


STEP FEEDER

Weather Proof • Pest Proof • Leave Knowing Your Birds Will Be Fed



Side-guards stop other birds from side feeding.

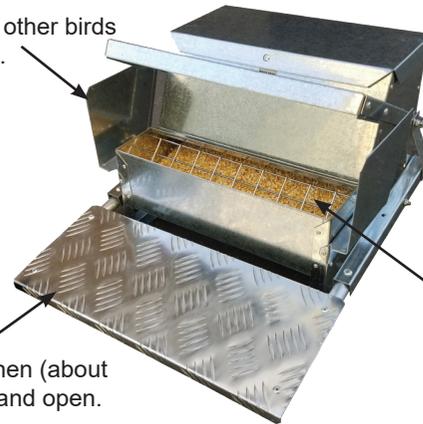

Grill reduces feed being flicked out.

ONE broiler or hen (about 2 lbs) can step and open.

Perfect for OUTDOOR PENS.


Don't feed rats, mice, sparrows and other wildlife. No more wet, soggy wasted feed. Pays for itself in feed savings. Most birds will readily learn to use it. There are two positions to assist in training if needed. 3-4 chickens can use it at one time. Do not use with chicks. Galvanized steel construction. Aluminum textured tread plate.

STEP FEEDER SPECIFICATIONS

Model No.	Description	Approx. Feed Capacity Lbs. (kg)	Approx. Bird Capacity	Size - Inches (cm)			Pack	Shipping Wt.	
				W	L	H		Lbs.	(kg)
SPF20	Step Feeder	20 (9.1)	12-15	17 (43.2)	20 (50.8) ¹	11 (27.9)	1	15	(6.8)

¹Length includes the tread plate (8 inches). Minimal assembly (4 bolts to attach tread plate). Shippable via ground package.

FEED SCOOPS



Model F4

An all purpose 4 quart scoop built to give years of service. Durable galvanized steel. Flat bottom slides easily into corners. Holds about 3.5 lbs. (1.6 kg) of feed. 12" L x 7" W x 7" H (30.5 cm x 17.8 x 17.8) Pack 12. 16 lbs. (7.3 kg)



Model 5S

A sturdy, economy 4 quart scoop. Polyethylene. Flat bottom. Great for dozens of uses. Loop on top of handle for hanging. Holds about 3.5 lbs. (1.6 kg.) of feed. 14" L x 6" W x 3 1/2" H (35.6 cm x 15.2 x 8.9). Pack 12. 8 lbs. (3.6 kg).

THERMOMETERS & HYGROMETER

(A). Model THI79 Incubator Thermometer

Heavy laminated poster board back, black numerals and markings, red spirit. Two scales. -30° to 50° C in 2° C increments (incubating temperature of 37.5° C is also marked). -20° to 120° F increments (incubating temperature of 99.5° F is also marked). 1 1/2" (3.8 cm) x 4" (10.1 cm). Wt. 1 oz. (28 gm).

(B). Model 5153 Brooder Thermometer


White, plastic frame. Multi-position mounting bracket. Non-fading red spirit. Two scales. -35° C to 50° C in 1° C increments. -25° F to 120° in 2° F increments. 2 1/4" (5.7 cm) x 7 1/2" (19.1 cm). Wt. 3 oz (84 gm).

(C). Model THI150 Adjustable Thermometer

1" (2.54 cm) dial bimetal face. Stainless steel case. Can be re-calibrated. Reads in °F only. 0-220° in 2° increments. Grommet fits 1/2 inch hole, 5 1/2" (14 cm) long. Wt. 1 oz. (28 gm).

(D). Model THI200 Hygrometer

Uses THI150 thermometer. 9" (22.9) wick with water bottle. Simple instructions on how to take dry bulb reading, wet bulb reading and then how to determine humidity. Wt. 1 oz. (28 gm).



ROLL OUT NESTS

Model 410BRO Can Be Front Roll Out, Back Roll Out - OR BOTH!



Change Panels



Roll Out Front and Back

Eggs laid in roll out nest trays stay cleaner. Back roll out nests allow the nest to be mounted with an egg collection aisle where the birds do not have access to the aisle. Nest trays can be used with perch assemblies in the front of the nest only. The backs are not designed for perches. Note: Our single unit, **Model 401RO** comes standard with a nest tray for either front or back roll out.


Specifications:

See specifications on page 18.

Tray and cover extend beyond the nest by about 5" (12.7 cm).

410BRO - 2 cartons. 45 lbs. (20.5 kg) and 14 lbs. (6.4 kg.)

On Model 410BRO, these two panels are interchangeable - both in the front and in the rear.



Nest Pad



Nest Tray Model TRA10

The tray fits all of our nests. Each tray has a clear cover.



Nest Pad Model 410BNP

Encourage hens to lay in the nest (instead of on the floor) by providing more comfort. 12" (30.5 cm) x 12" pads are slotted for good air circulation and for allowing droppings to fall through the pad. Reduce labor and possible contamination of litter in the nest. UV protected poly material can be washed and disinfected. 7-10 year life. 1/2" height.

Transport Coop

Designed for optimal air flow. Stackable. Easily washed and sanitized. High density polyethylene. Shipped knocked down but all snap together components. Assembly takes about 3 minutes with no tools. Door 12 1/2" wide x 16 1/2" long (31.8 cm wide x 42 cm long). Hand holds. 10 broiler capacity.

Model No.	Description
COOP12	Poultry Transport Coop. 22 1/2" wide x 38" long x 11" high (57.1 cm wide x 96.5 cm long x 27.9 cm high)

Egg Basket- Plastic Coated Model 215

Made of heavy wire securely welded at every joint. Continuous feet around base allow air flow under basket for fast cooling of eggs. Thick, plastic coating cushions eggs and reduces breakage...will not mark eggs. Will not deteriorate with detergents or extreme temperatures. Holds 15 dozen chicken eggs. Height: 9" (22.9 cm), Diameter: 14 1/2" (36.8 cm) Top: 10" (25.4 cm) Bottom. Weight: 1.4 lbs. (.64 kg).



Model PCF1 Fowl Catcher

Hook has smooth no-snap edges, bent for a sure catch. Plastic (no splinter, no chap) 4 1/2" (11.4 cm) handle is securely attached to heavy gauge wire shaft. Length 49 1/4" (125 cm). Weight 24 lbs. (10.9 kg), pack 12.

Model 398N5C, Model 398N9C and Model 398N11C Spiral Leg Bands.

Made of top quality celluloid rod with a full half overlap. Resilient, springy, non-brittle. Three sizes - 5/16" (7.9 mm), 9/16" (14.3 mm), 11/16" (17.5 mm) (inside diameter). Five colors - blue, green, red, white and yellow. We also can provide other sizes ranging from 1/4" for baby chicks and quail to 1" for turkey toms and geese. Also available are double coil leg bands. Note: There may be minimum order quantities on non-stocked leg bands.



UA4T



UA2

Electric Bulb Brooders - 2 Models

Model UA2 Single Bulb Brooder. For up to 100 chicks. Steel safety guard. Aluminum reflector (10" diameter or 25.4 cm). 110 V. 2 lb. (.9 kg) ship weight.

Model UA4T Four Bulb Brooder. For up to 350 chicks. Controlled thermostatically. One or four heating. One bulb always stays on and the other three are lit as required. This design saves energy. Galvanized steel reflector (14" diameter or 35.6 cm). Galvanized steel strap stand. 110 V. 6 lb (2.7 kg) ship weight.

On both models, bulbs not included, but we offer:

Model RLB Red Bulb and Model CLB Clear Bulb, both 250 watt.

Wafers & Switches

Wafers (Thermostat Wafers). Two styles. Both 3" (7.6 cm) diameter, 10-32 thread.

Model 31W has a threaded, reversible adapter. For most electric and gas brooders. Wt. 6 ozs. (171 grams).

Model 2W has a solid button on one side and an internally threaded post on the other side. For Brower 845 and 846 incubators and for Wards and Sears incubators. Wt. 6 ozs. (171 grams).


Temperature range of all wafers: 70-110° F (21-43° C).

Model 59S Electric Snap-Action Thermostat Switch

Thermostat switch, accurate, dependable, no interference. Dustproof molded plastic case. Shipped with No. 31W wafer. Easy to install. Mounting bracket. 2 1/2" (6.35 cm) x 3" (7.6 cm) with screws. Wt. 9 ozs. (257 grams).

Model 59S2 Incubator Switch

Same as 59S but with 2W incubator wafer. Wt. 9 ozs. (257 grams).

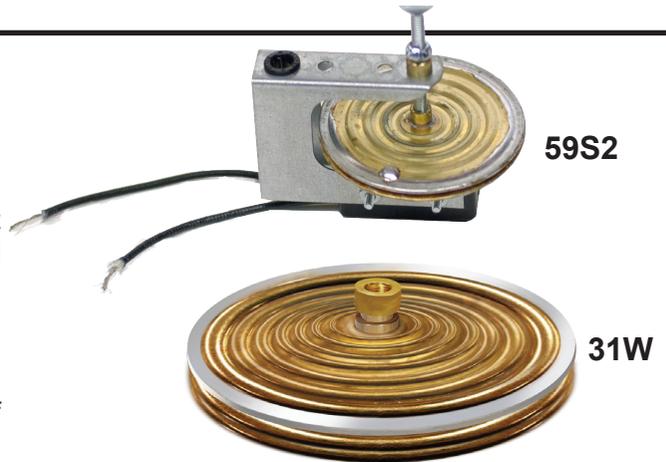

59S2

31W

Mouse Trap

Model 1010001. Completely automatic way of catching and disposing of mice without having to touch them. Easy to set...one winding of handle sets trap to catch 15 to 18 mice. Mice enter holes inside of trap, spring trap lever and are pushed into holding compartment...alive. Entire trap may be dipped in pail of water to destroy mice. No poisons, no dangerous traps to set...just wind it up and come back tomorrow. Size: 7" (17.8 cm) W x times 9" (22.9 cm) L x 5 1/2" (14.0 cm) H. Weight 4 lbs. (1.8 kg).



1010001

Rugged Pet Feeders - 2 Models

Galvanized steel. No sharp edges. Feed bowl designed to prevent waste. Notched back for optional wall mounting. Fully assembled. 1 Pack.

Model DF25

Holds approx. 25 lbs. (11.4 kg); 12 1/2" W x 11" I x 23" H (31.8 cm x 27.9 x 58.4); 11 lbs. (5 kg) ship weight.

Model DF50

Holds approx. 50 lbs. (22.7 kg); 16 1/2" W x 11 1/2" I x 28" H (41.9 cm x 29.2 x 71.1); 17 lbs. (7.7 kg) ship weight.



DF25

DF50